

Properties of MUSIC-type imaging in two-dimensional inverse scattering from thin inclusions or cracks

Won-Kwang Park

Department of Mathematics, Kookmin University, Seoul, 136-702, Korea.

Abstract

The main purpose of this paper is to study the structure of well-known non-iterative MULTIPLE SIGNAL CLASSIFICATION (MUSIC) algorithm. We investigate a relationship between MUSIC-type function for imaging of extended thin electromagnetic inclusions or perfectly conducting cracks and Bessel function of integer order of the first kind. This is based on the structure of left-singular vectors of collected Multi-Static Response (MSR) matrix whose elements are measured far-field pattern. Some numerical examples are illustrated for supporting our investigation.

Key words: Multiple Signal Classification (MUSIC) algorithm, Bessel function, extended thin electromagnetic inclusions, perfectly conducting cracks, numerical examples

1. Introduction

One of the goal of inverse scattering problems is to identify unknown properties (e.g., shapes, material properties, locations, and constitutions) of targets from measured scattered field data. Generally, this problems are solved by the Newton-type iteration scheme; minimization of scattered data and computed data by generating an admissible cost functional. Related works can be found in [1, 16, 22, 31] and references therein. Unfortunately, 1. non-convergence or appearance of several minima are arise in the reconstruction procedure due to the non-convex property of cost functional, 2. complex Fréchet derivative must be evaluated at each iteration step, and 3. *a priori* information of targets is required. Although, above conditions are full-filled, reconstruction procedure will be fail if one begins iteration process with a bad initial guess. Hence, generating a good initial guess close to the unknown target must be performed preferentially. For this, alternative non-iterative imaging algorithms has been developed in order to obtain a good initial guess for example linear sampling method [14, 21], multi-frequency based Kirchhoff and subspace migrations [4, 18, 23, 24, 25, 29], and topological derivative strategy [2, 10, 12, 26, 27].

In the pioneering research [15], based on the eigenvalue structure of MSR matrix, MUSIC algorithm have been developed to find locations of point-like scatterers. Recently, MUSIC algorithm was applied to the various problems for example, detection of anti-personnel mines [5], location search of small inclusions [6, 13] and hidden corrosion in pipe line [8], shape reconstruction of arbitrary shaped thin inclusions, cracks, and extended targets [4, 9, 19, 28, 30]. Based on these results, MUSIC algorithm offers an accurate location of small inclusions. In contrast, it is also effective in terms of shape identification but does not yield the complete shape of extended targets. Hence, obtained results adopted good initial guesses and successfully performed iterative based algorithm.

Although, MUSIC algorithm offers good results for small and extended targets, a detailed structure analysis must be considered since some phenomena cannot be explained for example, unexpected appearance of ghost replicas along the boundary of targets [19, Figure 9(b)] or an image with poor resolution [30,

Email address: parkkw@kookmin.ac.kr (Won-Kwang Park)

Section 4.4]. The above phenomena gives us an motivation of exploring some properties of MUSIC-type based imaging algorithm in the shape identification of arbitrary shaped thin electromagnetic inclusions and cracks considered in [28, 30]. Our analysis is based on the rigorously derives asymptotic expansion formula in the existence of thin inclusion [11] and physical factorization of MSR matrix [19]. With this, we will establish a relationship between MUSIC-type imaging function and Bessel function of integer order of the first kind.

This paper organized as follows. In section 2, we introduce two-dimensional direct scattering problems, asymptotic expansion formula in the presence of thin inclusions and MUSIC algorithm. In section 3, we identify structure of MUSIC imaging function and discuss some properties. Some numerical experiments are shown in section 4. This paper ends with a short conclusion in section 5.

2. Direct scattering problems and MUSIC algorithm

2.1. Two-dimensional direct scattering problems & asymptotic expansion formulae

Suppose that an extended electromagnetic Γ with small thickness is located in a two-dimensional homogeneous space $\mathbb{R}^2$. We assume that Γ is characterized by its thickness h and supporting curve σ as

$$\sigma = \{\mathbf{x} + \eta \mathbf{n}(\mathbf{x}) : \mathbf{x} \in \sigma, \eta \in (-h, h)\}.$$

Throughout this paper, we assume that Γ and $\mathbb{R}^2$ are classified by their dielectric permittivity and magnetic permeability at a given frequency ω . Let $0 < \varepsilon_0 < +\infty$ and $0 < \mu_0 < +\infty$ denote the permittivity and permeability of $\mathbb{R}^2$, respectively, and analogously $0 < \varepsilon < +\infty$ and $0 < \mu < +\infty$, those of the inclusion Γ . Then, we can define the piecewise constant dielectric permittivity $\varepsilon(\mathbf{x})$ and magnetic permeability $\mu(\mathbf{x})$ as

$$\varepsilon(\mathbf{x}) = \begin{cases} \varepsilon_0 & \text{for } \mathbf{x} \in \mathbb{R}^2 \setminus \bar{\Gamma} \\ \varepsilon & \text{for } \mathbf{x} \in \Gamma \end{cases} \quad \text{and} \quad \mu(\mathbf{x}) = \begin{cases} \mu_0 & \text{for } \mathbf{x} \in \mathbb{R}^2 \setminus \bar{\Gamma} \\ \mu & \text{for } \mathbf{x} \in \Gamma, \end{cases} \quad (1)$$

respectively. For convenience, we set $\varepsilon_0 = \mu_0 = 1$, $\varepsilon > \varepsilon_0$, and $\mu > \mu_0$.

For given fixed frequency ω (we assume that wave number $k = \omega\sqrt{\varepsilon_0\mu_0} = \omega$), we denote by

$$u_0(\mathbf{x}, \boldsymbol{\theta}; \omega) := e^{i\omega\boldsymbol{\theta} \cdot \mathbf{x}}, \quad \mathbf{x} \in \mathbb{R}^2, \quad (2)$$

a plane-wave incident field with the incident direction $\boldsymbol{\theta} \in \mathbb{S}^1$, where $\mathbb{S}^1$ denotes the unit circle. Let $u(\mathbf{x}, \boldsymbol{\theta}; \omega) = u_0(\mathbf{x}, \boldsymbol{\theta}; \omega) + u_s(\mathbf{x}, \boldsymbol{\theta}; \omega)$ denotes the time-harmonic total field which satisfies following Helmholtz equation

$$\nabla \cdot \left(\frac{1}{\mu(\mathbf{x})} \nabla u(\mathbf{x}, \boldsymbol{\theta}; \omega) \right) + \omega^2 \varepsilon(\mathbf{x}) u(\mathbf{x}, \boldsymbol{\theta}; \omega) = 0 \quad (3)$$

and unknown scattered field $u_s(\mathbf{x}, \boldsymbol{\theta}; \omega)$ satisfies the Sommerfeld radiation condition

$$\lim_{r \rightarrow 0} \sqrt{r} \left(\frac{\partial u_s(\mathbf{x}, \boldsymbol{\theta}; \omega)}{\partial r} - i\omega u_s(\mathbf{x}, \boldsymbol{\theta}; \omega) \right) = 0 \quad \text{uniformly in all directions } \frac{\mathbf{x}}{|\mathbf{x}|} \in \mathbb{S}^1.$$

Notice that above radiation condition implies the asymptotic behavior

$$u_s(\mathbf{x}, \boldsymbol{\theta}; \omega) = \frac{e^{i\omega|\mathbf{x}|}}{\sqrt{|\mathbf{x}|}} u_\infty(\hat{\mathbf{x}}, \boldsymbol{\theta}; \omega) + o\left(\frac{1}{\sqrt{|\mathbf{x}|}}\right) \quad \text{for all } |\mathbf{x}| \rightarrow +\infty, \quad \hat{\mathbf{x}} = \frac{\mathbf{x}}{|\mathbf{x}|}.$$

Then by virtue in [11], the far-field pattern can be written as following asymptotic expansion formula

$$u_\infty(\hat{\mathbf{y}}, \boldsymbol{\theta}; \omega) = h \frac{\omega^2(1+i)}{4\sqrt{\omega\pi}} \int_\sigma \left((-\hat{\mathbf{y}}) \cdot \mathbb{M}(\mathbf{x}) \cdot \boldsymbol{\theta} + (\varepsilon - 1) \right) e^{i\omega(\boldsymbol{\theta} - \hat{\mathbf{y}}) \cdot \mathbf{x}} d\sigma(\mathbf{x}) + o(h).$$

Here, a 2×2 symmetric matrix $\mathbb{A}(\mathbf{x})$ is defined as follows: for $\mathbf{x} \in \sigma$, let $\mathbf{t}(\mathbf{x})$ and $\mathbf{n}(\mathbf{x})$ denote unit tangent and normal vectors to σ at $\mathbf{x}$, respectively. Then

- $\mathbb{M}(\mathbf{x})$ has eigenvectors $\mathbf{t}(\mathbf{x})$ and $\mathbf{n}(\mathbf{x})$.
- The eigenvalue corresponding to $\mathbf{t}(\mathbf{x})$ is $2\left(\frac{1}{\mu} - 1\right)$.
- The eigenvalue corresponding to $\mathbf{n}(\mathbf{x})$ is $2(1 - \mu)$.

2.2. MUSIC-type imaging algorithm

Assume that we have the same incident and observation configuration. Then collected MSR matrix can be written

$$\mathbb{K} = (K_{jl}),$$

where K_{jl} is the far-field pattern in the j -th direction of observation and l -th direction of incident:

$$\begin{aligned} K_{jl} &= u_\infty(\hat{\mathbf{y}}_j, \boldsymbol{\theta}_l; \omega) \Big|_{\hat{\mathbf{y}}_j = -\boldsymbol{\theta}_j} \approx h \frac{\omega^2(1+i)}{4\sqrt{\omega\pi}} \int_\sigma \left(\boldsymbol{\theta}_j \cdot \mathbb{M}(\mathbf{x}) \cdot \boldsymbol{\theta}_l + (\varepsilon - 1) \right) e^{i\omega(\boldsymbol{\theta}_j + \boldsymbol{\theta}_l) \cdot \mathbf{x}} d\sigma(\mathbf{x}) \\ &= h \frac{\omega^2(1+i)}{4\sqrt{\omega\pi}} \frac{\text{length}(\sigma)}{M} \sum_{m=1}^M \left[2\left(\frac{1}{\mu} - 1\right) \boldsymbol{\theta}_j \cdot \mathbf{t}(\mathbf{x}_m) \boldsymbol{\theta}_l \cdot \mathbf{t}(\mathbf{x}_m) \right. \\ &\quad \left. + 2(1 - \mu) \boldsymbol{\theta}_j \cdot \mathbf{n}(\mathbf{x}_m) \boldsymbol{\theta}_l \cdot \mathbf{n}(\mathbf{x}_m) + (\varepsilon - 1) \right] e^{i\omega(\boldsymbol{\theta}_j + \boldsymbol{\theta}_l) \cdot \mathbf{x}} d\sigma(\mathbf{x}), \end{aligned}$$

where $\text{length}(\sigma)$ denotes the length of σ , refer to [30].

The MUSIC algorithm is as follows. First, let us perform the Singular Value Decomposition (SVD) of $\mathbb{K}$

$$\mathbb{K} = \mathbf{U} \mathbf{S} \mathbf{V}^* \approx \sum_{m=1}^M S_m \mathbf{U}_m(\mathbf{x}_m) \mathbf{V}_m(\mathbf{x}_m),$$

where $\mathbf{U}_m$ and $\mathbf{V}_m$ are left- and right-singular vectors of $\mathbb{K}$ and S_m denotes the non-zero singular values.

Second, based on the structure of left-singular vector, we define a vector $\mathbf{f}(\mathbf{z}) \in \mathbb{C}^{N \times 1}$ as

$$\mathbf{f}(\mathbf{z}) = \left[\mathbf{c}_1 \cdot (1, \boldsymbol{\theta}_1)^T e^{i\omega \boldsymbol{\theta}_1 \cdot \mathbf{z}}, \mathbf{c}_2 \cdot (1, \boldsymbol{\theta}_2)^T e^{i\omega \boldsymbol{\theta}_2 \cdot \mathbf{z}}, \dots, \mathbf{c}_N \cdot (1, \boldsymbol{\theta}_N)^T e^{i\omega \boldsymbol{\theta}_N \cdot \mathbf{z}} \right]^T, \quad (4)$$

where the selection of $\mathbf{c}_n \in \mathbb{R}^3 \setminus \{\mathbf{0}\}$, $n = 1, 2, \dots, N$ depends on the shape of the supporting curve $\sigma(\mathbf{x})$.

Finally, by defining a projection operator

$$P_{\text{noise}}(\mathbf{f}(\mathbf{z})) := \left(\mathbb{I}_N - \sum_{m=1}^M \mathbf{U}_m \mathbf{U}_m^T \right) \mathbf{f}(\mathbf{z}),$$

we can design MUSIC-type filter functional:

$$\mathbb{E}(\mathbf{z}) := \frac{1}{\|P_{\text{noise}}(\mathbf{f}(\mathbf{z}))\|}. \quad (5)$$

Remark 2.1. Based on the results [29, 30], the selection of $\mathbf{c}_n$ is a strong prerequisite. The selection depends on the shape of the supporting curve σ , e.g., $\mathbf{c}_n = (1, 0, 0)^T$ is a good choice for a purely dielectric contrast case. But for a purely magnetic contrast case, $\mathbf{c}_n$ must be of the form $\mathbf{c} = (0, \mathbf{b})^T$, where $\mathbf{b}$ is a linear combination of $\mathbf{t}(\mathbf{x}_m)$ and $\mathbf{n}(\mathbf{x}_m)$ for $m = 1, 2, \dots, M$. Unfortunately, we have no a priori information of shape of σ . Due to this reason, in [19, 28], a set of (large number of) directions are applied in order to find optimal vector $\mathbf{b}$. Applying this $\mathbf{b}$ yields a good result but this process requires large computational costs. Hence, we assume that $\mathbf{c}$ satisfies $\mathbf{c}_n \cdot (1, \boldsymbol{\theta}_n)^T = 1$ for all n , i.e.,

$$\mathbf{f}(\mathbf{z}) = \left[e^{i\omega \boldsymbol{\theta}_1 \cdot \mathbf{z}}, e^{i\omega \boldsymbol{\theta}_2 \cdot \mathbf{z}}, \dots, e^{i\omega \boldsymbol{\theta}_N \cdot \mathbf{z}} \right]^T, \quad (6)$$

and explore some properties of MUSIC-type imaging algorithm.

3. Properties of MUSIC-type imaging function

In this section, we determine MUSIC-type imaging function. Before proceeding, we recall a useful result developed in [17]. This plays a key roll of our explore.

Lemma 3.1 ([17]). *For sufficiently large N , $\boldsymbol{\theta} \in \mathbb{S}^1$, and $\boldsymbol{\xi} \in \mathbb{R}^2$,*

$$\begin{aligned}\frac{1}{N} \sum_{n=1}^N e^{i\omega \boldsymbol{\theta}_n \cdot \mathbf{x}} &\approx \frac{1}{2\pi} \int_{\mathbb{S}^1} e^{i\omega \boldsymbol{\theta} \cdot \mathbf{x}} dS(\boldsymbol{\theta}) = J_0(\omega|\mathbf{x}|), \\ \frac{1}{N} \sum_{n=1}^N \boldsymbol{\theta}_n \cdot \boldsymbol{\xi} e^{i\omega \boldsymbol{\theta}_n \cdot \mathbf{x}} &\approx \frac{1}{2\pi} \int_{\mathbb{S}^1} \boldsymbol{\theta} \cdot \boldsymbol{\xi} e^{i\omega \boldsymbol{\theta} \cdot \mathbf{x}} dS(\boldsymbol{\theta}) = i\mathbf{x} \cdot \boldsymbol{\xi} J_1(\omega|\mathbf{x}|).\end{aligned}$$

3.1. Thin electromagnetic inclusion case

For the first and simplest case, we consider the the dielectric permittivity contrast case, i.e., $\varepsilon \neq \varepsilon_0$ and $\mu = \mu_0$. The result is follows.

Theorem 3.2 (Only dielectric permittivity contrast case). *For sufficiently large N and ω , (5) can be written as follows:*

$$\mathbb{E}_\varepsilon(\mathbf{z}) := \frac{1}{\|P_{\text{noise}}(\mathbf{f}(\mathbf{z}))\|} \simeq \frac{1}{\sqrt{N}} \left(1 - \sum_{m=1}^M J_0(\omega|\mathbf{z} - \mathbf{x}_m|)^2 \right)^{-1/2}, \quad (7)$$

where $f \simeq g$ means that there exist a constant γ such that $f = \gamma g$.

Proof. In this case, the left singular vector is of the form

$$\mathbf{U}_m \simeq \frac{1}{\sqrt{N}} \left[e^{i\omega \boldsymbol{\theta}_1 \cdot \mathbf{x}_m}, e^{i\omega \boldsymbol{\theta}_2 \cdot \mathbf{x}_m}, \dots, e^{i\omega \boldsymbol{\theta}_N \cdot \mathbf{x}_m} \right]^T.$$

Notice that since ω is large enough

$$\mathbf{U}_m \cdot \overline{\mathbf{U}}_{m'} \simeq \frac{1}{N} \sum_{n=1}^N e^{i\omega \boldsymbol{\theta}_n \cdot (\mathbf{x}_m - \mathbf{x}_{m'})} \approx J_0(\omega|\mathbf{x}_m - \mathbf{x}_{m'}|) = \begin{cases} 1 & \text{if } m = m' \\ 0 & \text{if } m \neq m'. \end{cases} \quad (8)$$

Then P_{noise} can be written as

$$\begin{aligned}P_{\text{noise}}(\mathbf{f}(\mathbf{z})) &= \left(\mathbb{I}_N - \sum_{m=1}^M \mathbf{U}_m \overline{\mathbf{U}}_m^T \right) \mathbf{f}(\mathbf{z}) \\ &= \begin{bmatrix} e^{i\omega \boldsymbol{\theta}_1 \cdot \mathbf{z}} \\ e^{i\omega \boldsymbol{\theta}_2 \cdot \mathbf{z}} \\ \vdots \\ e^{i\omega \boldsymbol{\theta}_N \cdot \mathbf{z}} \end{bmatrix} - \frac{1}{N} \sum_{m=1}^M \begin{bmatrix} e^{i\omega \boldsymbol{\theta}_1 \cdot \mathbf{z}} + e^{i\omega \boldsymbol{\theta}_1 \cdot \mathbf{x}_m} e^{i\omega \boldsymbol{\theta}_2 \cdot (\mathbf{z} - \mathbf{x}_m)} + \dots + e^{i\omega \boldsymbol{\theta}_1 \cdot \mathbf{x}_m} e^{i\omega \boldsymbol{\theta}_N \cdot (\mathbf{z} - \mathbf{x}_m)} \\ e^{i\omega \boldsymbol{\theta}_2 \cdot \mathbf{x}_m} e^{i\omega \boldsymbol{\theta}_1 \cdot (\mathbf{z} - \mathbf{x}_m)} + e^{i\omega \boldsymbol{\theta}_2 \cdot \mathbf{z}} + \dots + e^{i\omega \boldsymbol{\theta}_2 \cdot \mathbf{x}_m} e^{i\omega \boldsymbol{\theta}_N \cdot (\mathbf{z} - \mathbf{x}_m)} \\ \vdots \\ e^{i\omega \boldsymbol{\theta}_N \cdot \mathbf{x}_m} e^{i\omega \boldsymbol{\theta}_1 \cdot (\mathbf{z} - \mathbf{x}_m)} + e^{i\omega \boldsymbol{\theta}_N \cdot \mathbf{x}_m} e^{i\omega \boldsymbol{\theta}_2 \cdot (\mathbf{z} - \mathbf{x}_m)} + \dots + e^{i\omega \boldsymbol{\theta}_N \cdot \mathbf{z}} \end{bmatrix} \\ &= \left[e^{i\omega \boldsymbol{\theta}_1 \cdot \mathbf{z}} - \sum_{m=1}^M e^{i\omega \boldsymbol{\theta}_1 \cdot \mathbf{x}_m} J_0(\omega|\mathbf{z} - \mathbf{x}_m|), \dots, e^{i\omega \boldsymbol{\theta}_N \cdot \mathbf{z}} - \sum_{m=1}^M e^{i\omega \boldsymbol{\theta}_N \cdot \mathbf{x}_m} J_0(\omega|\mathbf{z} - \mathbf{x}_m|) \right]^T\end{aligned}$$

since $e^{i\omega \boldsymbol{\theta}_n \cdot \mathbf{z}} = e^{i\omega \boldsymbol{\theta}_n \cdot \mathbf{x}_m} e^{i\omega \boldsymbol{\theta}_n \cdot (\mathbf{z} - \mathbf{x}_m)}$. Then

$$\begin{aligned}\|P_{\text{noise}}(\mathbf{f}(\mathbf{z}))\| &= \left[\sum_{n=1}^N \left(1 - \sum_{m=1}^M \left(e^{i\omega \boldsymbol{\theta}_n \cdot (\mathbf{z} - \mathbf{x}_m)} + e^{-i\omega \boldsymbol{\theta}_n \cdot (\mathbf{z} - \mathbf{x}_m)} \right) J_0(\omega|\mathbf{z} - \mathbf{x}_m|) \right. \right. \\ &\quad \left. \left. + \left(\sum_{m=1}^M e^{i\omega \boldsymbol{\theta}_n \cdot \mathbf{x}_m} J_0(\omega|\mathbf{z} - \mathbf{x}_m|) \right) \left(\sum_{m=1}^M e^{-i\omega \boldsymbol{\theta}_n \cdot \mathbf{x}_m} J_0(\omega|\mathbf{z} - \mathbf{x}_m|) \right) \right) \right]^{1/2}\end{aligned}$$

Since

$$\sum_{n=1}^N \sum_{m=1}^M \left(e^{i\omega \boldsymbol{\theta}_n \cdot (\mathbf{z} - \mathbf{x}_m)} + e^{-i\omega \boldsymbol{\theta}_n \cdot (\mathbf{z} - \mathbf{x}_m)} \right) J_0(\omega |\mathbf{z} - \mathbf{x}_m|) = 2N \sum_{m=1}^M J_0(\omega |\mathbf{z} - \mathbf{x}_m|)^2, \quad (9)$$

and applying orthogonal property (8) yields

$$\begin{aligned} & \left(\sum_{m=1}^M e^{i\omega \boldsymbol{\theta}_n \cdot \mathbf{x}_m} J_0(\omega |\mathbf{z} - \mathbf{x}_m|) \right) \left(\sum_{m=1}^M e^{-i\omega \boldsymbol{\theta}_n \cdot \mathbf{x}_m} J_0(\omega |\mathbf{z} - \mathbf{x}_m|) \right) \\ &= \sum_{n=1}^N \left(e^{-i\omega \boldsymbol{\theta}_n \cdot \mathbf{x}_m} J_0(\omega |\mathbf{z} - \mathbf{x}_m|) \right) \left(e^{i\omega \boldsymbol{\theta}_n \cdot \mathbf{x}_{m'}} J_0(\omega |\mathbf{z} - \mathbf{x}_{m'}|) \right) \\ &= \sum_{n=1}^N \left(e^{i\omega \boldsymbol{\theta}_n \cdot (\mathbf{x}_{m'} - \mathbf{x}_m)} J_0(\omega |\mathbf{z} - \mathbf{x}_m|) J_0(\omega |\mathbf{z} - \mathbf{x}_{m'}|) \right) \\ &= N J_0(\omega |\mathbf{x}_{m'} - \mathbf{x}_m|) J_0(\omega |\mathbf{z} - \mathbf{x}_m|) J_0(\omega |\mathbf{z} - \mathbf{x}_{m'}|) = \begin{cases} N J_0(\omega |\mathbf{z} - \mathbf{x}_m|)^2 & \text{if } m = m' \\ 0 & \text{if } m \neq m'. \end{cases} \end{aligned} \quad (10)$$

Therefore, by (9) and (10), we can obtain following result

$$\|P_{\text{noise}}(\mathbf{f}(\mathbf{z}))\| = \sqrt{N} \left(1 - \sum_{m=1}^M J_0(\omega |\mathbf{z} - \mathbf{x}_m|)^2 \right)^{1/2}.$$

□

Note that $J_0(x)$ has its maximum value 1 at $x = 0$. This means that (7) plots peaks of large magnitude (∞ in theory) at the location $\mathbf{x}_m \in \sigma$ and small one at $\mathbf{x} \notin \sigma$ (see Figure 1(a)). This is the reason that why MUSIC algorithm offers good result for purely dielectric contrast case for the full-view inverse scattering problem. We refer to Figure 2(a) and various results in [9, 19, 28, 30].

Next, we consider the magnetic permeability contrast case, i.e., $\varepsilon = \varepsilon_0$ and $\mu \neq \mu_0$. The result is follows.

Theorem 3.3 (Only magnetic permeability contrast case). *For sufficiently large N and ω , (5) can be written as follows:*

$$\mathbb{E}_\mu(\mathbf{z}) := \frac{1}{\|P_{\text{noise}}(\mathbf{f}(\mathbf{z}))\|} = \frac{1}{\sqrt{N}} \left(1 - \sum_{m=1}^M ((\mathbf{z} - \mathbf{x}_m) \cdot (\mathbf{t}(\mathbf{x}_m) + \mathbf{n}(\mathbf{x}_m)))^2 J_1(\omega |\mathbf{z} - \mathbf{x}_m|)^2 \right)^{-1/2}. \quad (11)$$

Proof. In this case, the left singular vector is of the form (see [30])

$$\mathbf{U}_{2(m-1)+s} \simeq \frac{1}{\sqrt{N}} \left[\boldsymbol{\theta}_1 \cdot \boldsymbol{\xi}_s(\mathbf{x}_m) e^{i\omega \boldsymbol{\theta}_1 \cdot \mathbf{x}_m}, \boldsymbol{\theta}_2 \cdot \boldsymbol{\xi}_s(\mathbf{x}_m) e^{i\omega \boldsymbol{\theta}_2 \cdot \mathbf{x}_m}, \dots, \boldsymbol{\theta}_N \cdot \boldsymbol{\xi}_s(\mathbf{x}_m) e^{i\omega \boldsymbol{\theta}_N \cdot \mathbf{x}_m} \right]^T,$$

where

$$\boldsymbol{\xi}_s(\mathbf{x}_m) := \begin{cases} \boldsymbol{\tau}(\mathbf{x}_m) & \text{if } s = 1 \\ \mathbf{n}(\mathbf{x}_m) & \text{if } s = 2. \end{cases}$$

Then based on the orthonormal property of singular vectors, we can observe following: if ω is large enough, and if $m \neq m'$ or $s \neq s''$ then

$$\begin{aligned} \mathbf{U}_{2(m-1)+s} \cdot \overline{\mathbf{U}}_{2(m'-1)+s''} &\simeq \frac{1}{N} \sum_{n=1}^N \left(\boldsymbol{\theta}_n \cdot (\boldsymbol{\xi}_s(\mathbf{x}_m) + \boldsymbol{\xi}_{s''}(\mathbf{x}_{m'})) \right) e^{i\omega \boldsymbol{\theta}_n \cdot (\mathbf{x}_m - \mathbf{x}_{m'})} \\ &\approx i(\mathbf{x}_m - \mathbf{x}_{m'}) \cdot (\boldsymbol{\xi}_s(\mathbf{x}_m) + \boldsymbol{\xi}_{s''}(\mathbf{x}_{m'})) J_1(\omega |\mathbf{x}_m - \mathbf{x}_{m'}|) = 0. \end{aligned} \quad (12)$$

At this moment, we select $\mathbf{f}(\mathbf{z})$ in (6) then P_{noise} can be written as

$$\begin{aligned}
P_{\text{noise}}(\mathbf{f}(\mathbf{z})) &= \left(\mathbb{I}_N - \sum_{m=1}^M \sum_{s=1}^2 \mathbf{U}_{2(m-1)+s} \overline{\mathbf{U}}_{2(m-1)+s}^T \right) \mathbf{f}(\mathbf{z}) \\
&= \begin{bmatrix} e^{i\omega\boldsymbol{\theta}_1 \cdot \mathbf{z}} \\ e^{i\omega\boldsymbol{\theta}_2 \cdot \mathbf{z}} \\ \vdots \\ e^{i\omega\boldsymbol{\theta}_N \cdot \mathbf{z}} \end{bmatrix} - \frac{1}{N} \sum_{m=1}^M \sum_{s=1}^2 \begin{bmatrix} (\boldsymbol{\theta}_1 \cdot \boldsymbol{\xi}_s(\mathbf{x}_m)) e^{i\omega\boldsymbol{\theta}_1 \cdot \mathbf{x}_m} \sum_{n=1}^N (\boldsymbol{\theta}_n \cdot \boldsymbol{\xi}_s(\mathbf{x}_m)) e^{i\omega\boldsymbol{\theta}_n \cdot (\mathbf{z} - \mathbf{x}_m)} \\ (\boldsymbol{\theta}_2 \cdot \boldsymbol{\xi}_s(\mathbf{x}_m)) e^{i\omega\boldsymbol{\theta}_2 \cdot \mathbf{x}_m} \sum_{n=1}^N (\boldsymbol{\theta}_n \cdot \boldsymbol{\xi}_s(\mathbf{x}_m)) e^{i\omega\boldsymbol{\theta}_n \cdot (\mathbf{z} - \mathbf{x}_m)} \\ \vdots \\ (\boldsymbol{\theta}_N \cdot \boldsymbol{\xi}_s(\mathbf{x}_m)) e^{i\omega\boldsymbol{\theta}_N \cdot \mathbf{x}_m} \sum_{n=1}^N (\boldsymbol{\theta}_n \cdot \boldsymbol{\xi}_s(\mathbf{x}_m)) e^{i\omega\boldsymbol{\theta}_n \cdot (\mathbf{z} - \mathbf{x}_m)} \end{bmatrix} \\
&= \begin{bmatrix} e^{i\omega\boldsymbol{\theta}_1 \cdot \mathbf{z}} - i \sum_{m=1}^M \sum_{s=1}^2 (\boldsymbol{\theta}_1 \cdot \boldsymbol{\xi}_s(\mathbf{x}_m)) ((\mathbf{z} - \mathbf{x}_m) \cdot \boldsymbol{\xi}_s(\mathbf{x}_m)) e^{i\omega\boldsymbol{\theta}_1 \cdot \mathbf{x}_m} J_1(\omega|\mathbf{z} - \mathbf{x}_m|) \\ e^{i\omega\boldsymbol{\theta}_2 \cdot \mathbf{z}} - i \sum_{m=1}^M \sum_{s=1}^2 (\boldsymbol{\theta}_2 \cdot \boldsymbol{\xi}_s(\mathbf{x}_m)) ((\mathbf{z} - \mathbf{x}_m) \cdot \boldsymbol{\xi}_s(\mathbf{x}_m)) e^{i\omega\boldsymbol{\theta}_2 \cdot \mathbf{x}_m} J_1(\omega|\mathbf{z} - \mathbf{x}_m|) \\ \vdots \\ e^{i\omega\boldsymbol{\theta}_N \cdot \mathbf{z}} - i \sum_{m=1}^M \sum_{s=1}^2 (\boldsymbol{\theta}_N \cdot \boldsymbol{\xi}_s(\mathbf{x}_m)) ((\mathbf{z} - \mathbf{x}_m) \cdot \boldsymbol{\xi}_s(\mathbf{x}_m)) e^{i\omega\boldsymbol{\theta}_N \cdot \mathbf{x}_m} J_1(\omega|\mathbf{z} - \mathbf{x}_m|) \end{bmatrix}^T.
\end{aligned}$$

Then

$$\begin{aligned}
\|P_{\text{noise}}(\mathbf{f}(\mathbf{z}))\| &= \left[\sum_{n=1}^N \left(1 + i \sum_{m=1}^M \sum_{s=1}^2 (\boldsymbol{\theta}_n \cdot \boldsymbol{\xi}_s(\mathbf{x}_m)) ((\mathbf{z} - \mathbf{x}_m) \cdot \boldsymbol{\xi}_s(\mathbf{x}_m)) e^{i\omega\boldsymbol{\theta}_n \cdot (\mathbf{z} - \mathbf{x}_m)} J_1(\omega|\mathbf{z} - \mathbf{x}_m|) \right. \right. \\
&\quad \left. \left. - i \sum_{m=1}^M \sum_{s=1}^2 (\boldsymbol{\theta}_n \cdot \boldsymbol{\xi}_s(\mathbf{x}_m)) ((\mathbf{z} - \mathbf{x}_m) \cdot \boldsymbol{\xi}_s(\mathbf{x}_m)) e^{-i\omega\boldsymbol{\theta}_n \cdot (\mathbf{z} - \mathbf{x}_m)} J_1(\omega|\mathbf{z} - \mathbf{x}_m|) \right. \right. \\
&\quad \left. \left. + \left(\sum_{m=1}^M \sum_{s=1}^2 (\boldsymbol{\theta}_n \cdot \boldsymbol{\xi}_s(\mathbf{x}_m)) ((\mathbf{z} - \mathbf{x}_m) \cdot \boldsymbol{\xi}_s(\mathbf{x}_m)) e^{i\omega\boldsymbol{\theta}_n \cdot \mathbf{x}_m} J_1(\omega|\mathbf{z} - \mathbf{x}_m|) \right) \right. \right. \\
&\quad \left. \left. \left(\sum_{m=1}^M \sum_{s=1}^2 (\boldsymbol{\theta}_n \cdot \boldsymbol{\xi}_s(\mathbf{x}_m)) ((\mathbf{z} - \mathbf{x}_m) \cdot \boldsymbol{\xi}_s(\mathbf{x}_m)) e^{-i\omega\boldsymbol{\theta}_n \cdot \mathbf{x}_m} J_1(\omega|\mathbf{z} - \mathbf{x}_m|) \right) \right) \right]^{1/2}.
\end{aligned}$$

Applying Theorem 3.1 we can obtain

$$\sum_{n=1}^N \left(i(\boldsymbol{\theta}_n \cdot \boldsymbol{\xi}_s(\mathbf{x}_m)) e^{i\omega\boldsymbol{\theta}_n \cdot (\mathbf{z} - \mathbf{x}_m)} - i(\boldsymbol{\theta}_n \cdot \boldsymbol{\xi}_s(\mathbf{x}_m)) e^{-i\omega\boldsymbol{\theta}_n \cdot (\mathbf{z} - \mathbf{x}_m)} \right) = -2N((\mathbf{z} - \mathbf{x}_m) \cdot \boldsymbol{\xi}_s(\mathbf{x}_m)) J_1(\omega|\mathbf{z} - \mathbf{x}_m|). \quad (13)$$

And, based on the orthogonal property (12), we assume that $m = m'$ then

$$\begin{aligned}
& \sum_{n=1}^N \left((\boldsymbol{\theta}_n \cdot \boldsymbol{\xi}_s(\mathbf{x}_m)) ((\mathbf{z} - \mathbf{x}_m) \cdot \boldsymbol{\xi}_s(\mathbf{x}_m)) e^{i\omega \boldsymbol{\theta}_n \cdot \mathbf{x}_m} J_1(\omega |\mathbf{z} - \mathbf{x}_m|) \right) \\
& \times \left((\boldsymbol{\theta}_n \cdot \boldsymbol{\xi}_{s''}(\mathbf{x}_{m'})) ((\mathbf{z} - \mathbf{x}_{m'}) \cdot \boldsymbol{\xi}_{s''}(\mathbf{x}_{m'})) e^{-i\omega \boldsymbol{\theta}_n \cdot \mathbf{x}_{m'}} J_1(\omega |\mathbf{z} - \mathbf{x}_{m'}|) \right) \\
& = \sum_{n=1}^N \left((\boldsymbol{\theta}_n \cdot \boldsymbol{\xi}_s(\mathbf{x}_m))^2 ((\mathbf{z} - \mathbf{x}_m) \cdot \boldsymbol{\xi}_s(\mathbf{x}_m))^2 + (\boldsymbol{\theta}_n \cdot \boldsymbol{\xi}_{s''}(\mathbf{x}_m))^2 ((\mathbf{z} - \mathbf{x}_m) \cdot \boldsymbol{\xi}_{s''}(\mathbf{x}_m))^2 \right) J_1(\omega |\mathbf{z} - \mathbf{x}_m|)^2 \\
& = \left(\frac{1}{N} \sum_{n=1}^N (\boldsymbol{\theta}_n \cdot \boldsymbol{\xi}_s(\mathbf{x}_m))^2 \right) N((\mathbf{z} - \mathbf{x}_m) \cdot \boldsymbol{\xi}_s(\mathbf{x}))^2 J_1(\omega |\mathbf{z} - \mathbf{x}_m|)^2 \\
& \quad + \left(\frac{1}{N} \sum_{n=1}^N (\boldsymbol{\theta}_n \cdot \boldsymbol{\xi}_{s''}(\mathbf{x}_m))^2 \right) N((\mathbf{z} - \mathbf{x}_m) \cdot \boldsymbol{\xi}_{s''}(\mathbf{x}))^2 J_1(\omega |\mathbf{z} - \mathbf{x}_m|)^2 \\
& = \frac{N J_1(\omega |\mathbf{z} - \mathbf{x}_m|)^2}{2\pi} \left(((\mathbf{z} - \mathbf{x}_m) \cdot \boldsymbol{\xi}_s(\mathbf{x}))^2 \int_{\mathbb{S}^1} (\boldsymbol{\varphi} \cdot \boldsymbol{\xi}_s(\mathbf{x}_m))^2 dS(\boldsymbol{\varphi}) + ((\mathbf{z} - \mathbf{x}_m) \cdot \boldsymbol{\xi}_{s''}(\mathbf{x}))^2 \int_{\mathbb{S}^1} (\boldsymbol{\varphi} \cdot \boldsymbol{\xi}_{s''}(\mathbf{x}_m))^2 dS(\boldsymbol{\varphi}) \right) \quad (14)
\end{aligned}$$

Now, we consider the polar coordinate; since $\boldsymbol{\varphi}, \boldsymbol{\xi}_s \in \mathbb{S}^1$, let $\boldsymbol{\varphi} = (\cos \phi, \sin \phi)^T$ and $\boldsymbol{\xi}_s = (\cos \psi, \sin \psi)^T$ then elementary calculus yields

$$\int_{\mathbb{S}^1} (\boldsymbol{\varphi} \cdot \boldsymbol{\xi}_s(\mathbf{x}_m))^2 dS(\boldsymbol{\varphi}) = \int_0^{2\pi} \cos^2(\phi - \psi) d\phi = 2 \int_0^\pi \cos^2 \phi d\phi = 2 \left[\frac{1}{2} \sin \phi \cos \phi + \frac{1}{2} \phi \right]_0^\pi = \pi. \quad (15)$$

Therefore, by (13), (14), and (15), we can obtain

$$\|P_{\text{noise}}(\mathbf{f}(\mathbf{z}))\| = \sqrt{N} \left(1 - \sum_{m=1}^M ((\mathbf{z} - \mathbf{x}_m) \cdot (\mathbf{t}(\mathbf{x}_m) + \mathbf{n}(\mathbf{x}_m)))^2 J_1(\omega |\mathbf{z} - \mathbf{x}_m|)^2 \right)^{1/2}.$$

□

Opposite to the case of permittivity contrast case, (11) will plots two curves with large magnitude in the neighborhood of supporting curve σ because $J_1(x)$ has maximum value in some neighborhood of $x = 0$. This is the reason why two ghost replicas with large magnitude and many afterimages with small magnitude are appear in the map of (11) instead of true shape of supporting curve σ when we select $\mathbf{c}_n$ such that $\mathbf{c}_n \cdot (1, \boldsymbol{\theta}_n)^T = 1$ (see Figure 1(b)). Related numerical examples can be found in Figure 2(b) and in [19, Section 5].

Finally, by combining (7) and (11), we can obtain following result

Theorem 3.4 (Both permittivity and permeability contrast case). *Let $\varepsilon \neq \varepsilon_0$ and $\mu \neq \mu_0$. Then, for sufficiently large N and ω , (5) can be written as follows:*

$$\mathbb{E}_{\varepsilon, \mu}(\mathbf{z}) := \frac{1}{\sqrt{N}} \left(1 - \sum_{m=1}^M \left(J_0(\omega |\mathbf{z} - \mathbf{x}_m|)^2 + ((\mathbf{z} - \mathbf{x}_m) \cdot (\mathbf{t}(\mathbf{x}_m) + \mathbf{n}(\mathbf{x}_m)))^2 J_1(\omega |\mathbf{z} - \mathbf{x}_m|)^2 \right) \right)^{-1/2}. \quad (16)$$

This result shows that (16) plots large magnitude at $\mathbf{z}$ satisfies $\mathbf{z} \neq \mathbf{x}_m$ and

$$\sum_{m=1}^M \left(J_0(\omega |\mathbf{z} - \mathbf{x}_m|)^2 + ((\mathbf{z} - \mathbf{x}_m) \cdot (\mathbf{t}(\mathbf{x}_m) + \mathbf{n}(\mathbf{x}_m)))^2 J_1(\omega |\mathbf{z} - \mathbf{x}_m|)^2 \right) = 1.$$

It means that a result with poor resolution will appear. See Figure 2(c) and examples in [30, Section 4.4].

3.2. Perfectly conducting crack case

In this part, we let Γ be a smooth curve which describes the crack: for an injective piecewise smooth function $\phi : [-1, 1] \rightarrow \mathbb{R}^2$,

$$\Gamma = \{\phi(z) : z \in [-1, 1]\}. \quad (17)$$

Let $u(\mathbf{x}, \boldsymbol{\theta}; \omega)$ be the single-component electric field that satisfies the Helmholtz equation:

$$\Delta u(\mathbf{x}, \boldsymbol{\theta}; \omega) + \omega^2 u(\mathbf{x}, \boldsymbol{\theta}; \omega) = 0 \quad \text{in } \mathbb{R}^2 \setminus \Gamma.$$

For the sound-soft arc (Transverse Magnetic polarization – TM) case, $u(\mathbf{x}, \boldsymbol{\theta}; \omega)$ satisfies the Dirichlet boundary condition on Γ :

$$u(\mathbf{x}, \boldsymbol{\theta}; \omega) = 0 \quad \text{on } \Gamma$$

and for the sound-hard arc (Transverse Electric polarization – TE) case, $u(\mathbf{x}, \boldsymbol{\theta}; \omega)$ satisfies the Neumann boundary condition on Γ :

$$\frac{\partial u(\mathbf{x}, \boldsymbol{\theta}; \omega)}{\partial \mathbf{n}(\mathbf{x})} = 0 \quad \text{on } \Gamma,$$

where $\mathbf{n}(\mathbf{x})$ is a unit normal vector to Γ at $\mathbf{x}$.

Then the far-field pattern $u_\infty(\hat{\mathbf{y}}, \boldsymbol{\theta}; \omega)$ for the scattering of an incident field $u_0(\mathbf{x}, \boldsymbol{\theta}; \omega) = e^{i\omega \boldsymbol{\theta} \cdot \mathbf{x}}$ from Γ is given by (see [22])

$$u_\infty(\hat{\mathbf{y}}, \boldsymbol{\theta}; \omega) = \begin{cases} \frac{1+i}{4\sqrt{\pi\omega}} \int_{\Gamma} e^{-i\hat{\mathbf{y}} \cdot \mathbf{x}} \varphi(\mathbf{x}; \boldsymbol{\theta}) d\mathbf{x} & : \text{sound-soft arc} \\ \frac{(1-i)\sqrt{\omega}}{4\sqrt{\pi}} \int_{\Gamma} \hat{\mathbf{y}} \cdot \mathbf{n}(\mathbf{x}) e^{-i\hat{\mathbf{y}} \cdot \mathbf{x}} \psi(\mathbf{x}; \boldsymbol{\theta}) d\mathbf{x} & : \text{sound-hard arc.} \end{cases}$$

Based on the physical factorization in [19, 28], for coincide incident and observation configuration, left-singular vector of MSR matrix is of the form:

$$\mathbf{U}_m = \begin{cases} \left[e^{i\omega \boldsymbol{\theta}_1 \cdot \mathbf{x}_m}, e^{i\omega \boldsymbol{\theta}_2 \cdot \mathbf{x}_m}, \dots, e^{i\omega \boldsymbol{\theta}_N \cdot \mathbf{x}_m} \right]^T & : \text{sound-soft arc} \\ \left[(\boldsymbol{\theta}_1 \cdot \mathbf{n}(\mathbf{x}_m)) e^{i\omega \boldsymbol{\theta}_1 \cdot \mathbf{x}_m}, (\boldsymbol{\theta}_2 \cdot \mathbf{n}(\mathbf{x}_m)) e^{i\omega \boldsymbol{\theta}_2 \cdot \mathbf{x}_m}, \dots, (\boldsymbol{\theta}_N \cdot \mathbf{n}(\mathbf{x}_m)) e^{i\omega \boldsymbol{\theta}_N \cdot \mathbf{x}_m} \right]^T & : \text{sound-hard arc.} \end{cases}$$

This means that the structure of left singular vectors for sound-soft and sound-hard arc is same as the one of permittivity contrast case and permeability contrast case, respectively. Hence, MUSIC imaging function is same as in Theorem 3.2 and Theorem 3.3 for sound-soft and sound-hard arc, respectively.

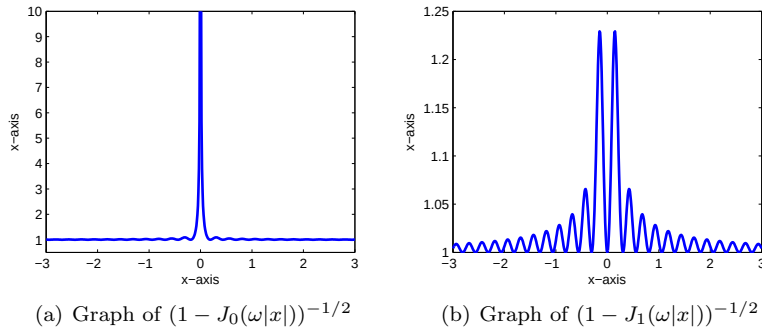


Figure 1: Graphs of $(1 - J_\nu(\omega|x|))^{-1/2}$, $\nu = 0, 1$, for $\omega = 2\pi/0.5$.

Remark 3.5. Based on recent work [23], the structure of so-called “subspace migration” is

$$\mathbb{E}_{SM}(\mathbf{z}) = \begin{cases} \sum_{m=1}^M J_0(\omega|\mathbf{z} - \mathbf{x}_m|)^2, & \text{permittivity contrast case} \\ \sum_{m=1}^M \left((\mathbf{z} - \mathbf{x}_m) \cdot (\mathbf{t}(\mathbf{x}_m) + \mathbf{n}(\mathbf{x}_m)) J_1(\omega|\mathbf{z} - \mathbf{x}_m|) \right)^2, & \text{permeability contrast case.} \end{cases}$$

Hence, we can observe following relationship between MUSIC and subspace migration as

$$\mathbb{E}(\mathbf{z}) = \frac{1}{\sqrt{1 - \mathbb{E}_{SM}(\mathbf{z})}}$$

if we select vector $\mathbf{f}(\mathbf{z})$ of (6) as

$$\mathbf{f}(\mathbf{z}) = \frac{1}{\sqrt{N}} \left[e^{i\omega\boldsymbol{\theta}_1 \cdot \mathbf{z}}, e^{i\omega\boldsymbol{\theta}_2 \cdot \mathbf{z}}, \dots, e^{i\omega\boldsymbol{\theta}_N \cdot \mathbf{z}} \right]^T.$$

This result is exactly same as derived in [3, Formula (7.4)].

3.3. Small electromagnetic inclusions case

We briefly consider the MUSIC-type imaging for the imaging of electromagnetic inclusions Σ_m with small diameter r :

$$\Sigma_m := \mathbf{x}_m + rB_m, \quad m = 1, 2, \dots, M,$$

where B_m is a simply connected smooth domain containing the origin. We assume that Σ_m are sufficiently separated from each other, and denote Σ be the collection of such inclusions.

Same as section 2, we let $u(\mathbf{x}, \boldsymbol{\theta}; \omega)$ satisfies (3) in the presence of Σ and $u_0(\mathbf{x}, \boldsymbol{\theta}; \omega)$ is given by (2). Then by virtue in [7], the far-field pattern can be written as following asymptotic expansion

$$u_\infty(\hat{\mathbf{y}}, \boldsymbol{\theta}; \omega) = r^2 \frac{\omega^2(1+i)}{4\sqrt{\omega\pi}} \sum_{m=1}^M |B_m| \left((-\hat{\mathbf{y}}) \cdot \mathbb{A}(\mathbf{x}_m) \cdot \boldsymbol{\theta} + (\varepsilon - 1) \right) e^{i\omega(\boldsymbol{\theta} - \hat{\mathbf{y}}) \cdot \mathbf{x}_m} + o(r^2). \quad (18)$$

Here, $\mathbb{A}(\mathbf{x}_m)$ denotes the polarization tensor corresponding to the Σ_m (see [7]).

Then by a similar process, we can obtain following results:

Theorem 3.6. Let N and ω are sufficiently large. Then (5) can be written as follows.

1. Dielectric permittivity contrast case:

$$\mathbb{E}_\varepsilon(\mathbf{z}) \simeq \frac{1}{\sqrt{N}} \left(1 - \sum_{m=1}^M J_0(\omega|\mathbf{z} - \mathbf{x}_m|)^2 \right)^{-1/2}.$$

2. Magnetic permeability contrast case:

$$\mathbb{E}_\mu(\mathbf{z}) \simeq \frac{1}{\sqrt{N}} \left(1 - \sum_{m=1}^M \left[((\mathbf{x} - \mathbf{z}_m) \cdot (\mathbf{e}_1 + \mathbf{e}_2)) J_1(\omega|\mathbf{z} - \mathbf{x}_m|) \right]^2 \right)^{-1/2},$$

where $\{\mathbf{e}_1, \mathbf{e}_2\}$ denotes an orthonormal basis in $\mathbb{R}^2$.

3. Both permittivity and permeability contrast case:

$$\mathbb{E}_{\varepsilon, \mu}(\mathbf{z}) \simeq \frac{1}{\sqrt{N}} \left(1 - \sum_{m=1}^M \left[J_0(\omega|\mathbf{z} - \mathbf{x}_m|)^2 + ((\mathbf{x} - \mathbf{z}_m) \cdot (\mathbf{e}_1 + \mathbf{e}_2))^2 J_1(\omega|\mathbf{z} - \mathbf{x}_m|)^2 \right] \right)^{-1/2}.$$

Remark 3.7. Now, let Σ_m denotes the perfectly conducting inclusions with small diameter. Then, based on the result in [17, Theorem 3.1], asymptotic expansion formulas for TM- and TE-cases are similar to the (18). Hence, structure of (5) will be same as Theorem 3.6.

4. Numerical examples

In this section, we illustrate some numerical examples. For this, we choose a thin inclusion $\Gamma = \{\mathbf{x} + \eta \mathbf{n}(x) : \mathbf{x} \in \sigma, \eta \in (-h, h)\}$ with smooth supporting curve

$$\sigma = \left\{ (z + 0.2, z^3 + z^2 - 0.3)^T : z \in [-0.5, 0.5] \right\}.$$

For the illumination and observation directions $\boldsymbol{\theta}_n$, they are chosen as

$$\boldsymbol{\theta}_n = \left(\cos \frac{2n\pi}{N}, \sin \frac{2n\pi}{N} \right)^T$$

for $n = 1, 2, \dots, N$. Total number of directions is $N = 40$ and applied frequency is $\omega = 2\pi/\lambda$ with wavelength $\lambda = 0.4$.

Figure 2 shows the map of $\mathbb{E}_\varepsilon(\mathbf{z})$, $\mathbb{E}_\mu(\mathbf{z})$, and $\mathbb{E}_{\varepsilon,\mu}(\mathbf{z})$ in the existence of Γ . Based on this result, we can easily observe that MUSIC algorithm offers very accurate result for permittivity contrast case. For permeability contrast case, as we explored in Theorem 3.3, we cannot obtain true shape of Γ . However, we can obtain an approximate shape of Γ based on the identified two ghost replicas since Γ lies between them based on Theorem 3.3. For both permittivity and permeability contrast case, we can recognize the existence of Γ but it is very hard to identify complete shape.

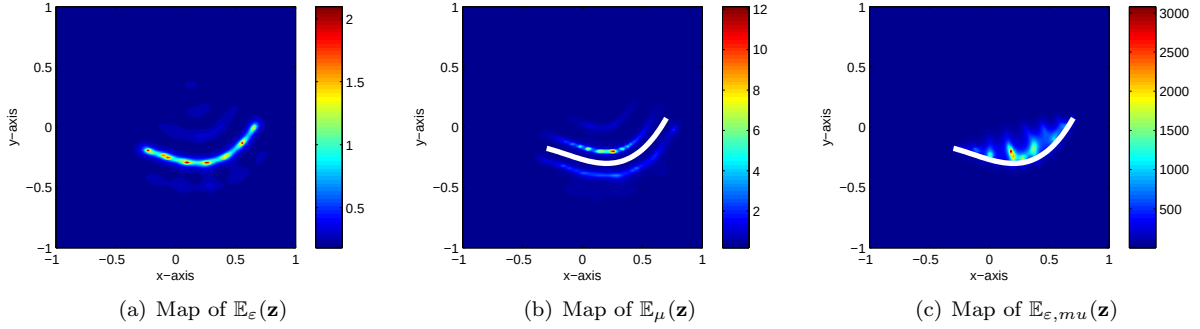


Figure 2: Image result via MUSIC algorithm. White colored line is true inclusion.

For numerical example of perfectly conducting crack, we select a smooth curve of (17) as

$$\phi(z) = \left\{ \left(z, \frac{1}{2} \cos \frac{z\pi}{2} + \frac{1}{5} \sin \frac{z\pi}{2} - \frac{1}{10} \cos \frac{3z\pi}{2} \right)^T : z \in [-1, 1] \right\}$$

and same test configuration as above. Maps of $\mathbb{E}(\mathbf{z})$ are illustrated in Figure 3. By comparing results in Figure 2, we can observe Theorem 3.2 and 3.3 holds for sound-soft and sound-hard arc case, respectively.

5. Concluding remarks

Based on the structure of left-singular vectors of MSR matrix, we investigated the structure of MUSIC-type imaging function by linking a relationship with the Bessel function of integer order of the first kind.

Recent work [25] has shown that the MUSIC-type imaging algorithm cannot be applied to limited-view inverse scattering problems. In order to analyze the structure, the integration in Lemma 3.1 on the subset of a unit circle must be evaluated; however, this evaluation is very difficult to perform and in our knowledge, there is no finite representation about it. Therefore, extension to the limited-view inverse scattering problem will be an interesting research topic. Moreover, the considered method can be extended to a three-dimensional problem and we believe that the MUSIC-type imaging function will be linked to the spherical Bessel function.

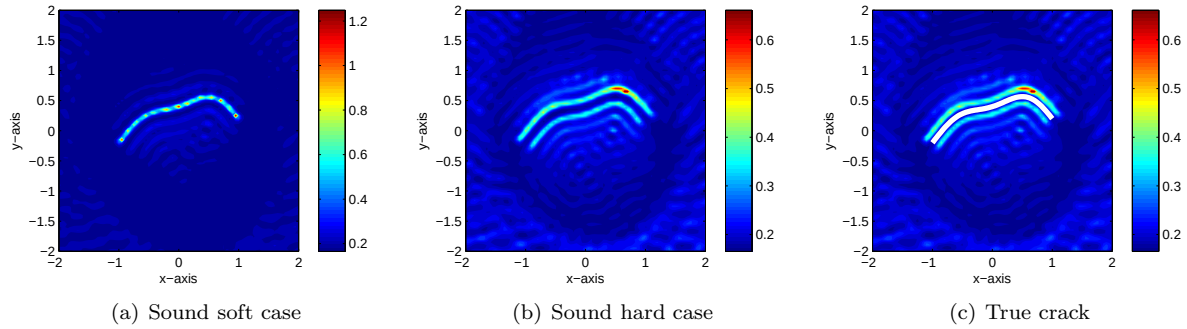


Figure 3: Maps of $\mathbb{E}(\mathbf{z})$ for $\omega = 2\pi/0.4$. White colored line is true crack.

References

- [1] D. Álvarez, O. Dorn, N. Irishina, and M. Moscoso, Crack reconstruction using a level-set strategy, *J. Comput. Phys.*, 228 (2009), 5710–5721.
- [2] H. Ammari, J. Garnier, V. Jugnon, and H. Kang, Stability and resolution analysis for a topological derivative based imaging functional, *SIAM J. Control. Optim.*, 50 (2012), 48–76.
- [3] H. Ammari, J. Garnier, H. Kang, M. Lim, and K. Sølna, Multistatic imaging of extended targets, *SIAM J. Imag. Sci.*, 5 (2012), 564–600.
- [4] H. Ammari, J. Garnier, H. Kang, W.-K. Park, and K. Sølna, Imaging schemes for perfectly conducting cracks, *SIAM J. Appl. Math.*, 71 (2011), 68–91.
- [5] H. Ammari, E. Iakovleva and D. Lesselier, A MUSIC algorithm for locating small inclusions buried in a half-space from the scattering amplitude at a fixed frequency, *SIAM Multiscale Modeling Simulation*, 3 (2005), 597–628.
- [6] H. Ammari, E. Iakovleva, D. Lesselier and G. Perrusson, MUSIC type electromagnetic imaging of a collection of small three-dimensional inclusions, *SIAM J. Sci. Comput.*, 29 (2007), 674–709.
- [7] H. Ammari and H. Kang, Reconstruction of small inhomogeneities from boundary measurements, *Lecture Notes in Mathematics*, 1846 (2004), Springer-Verlag, Berlin.
- [8] H. Ammari, H. Kang, E. Kim, K. Louati and M. S. Vogelius, A MUSIC-type algorithm for detecting internal corrosion from electrostatic boundary measurements, *Numer. Math.*, 108 (2008), 501–528.
- [9] H. Ammari, H. Kang, H. Lee and W.-K. Park, Asymptotic imaging of perfectly conducting cracks, *SIAM J. Sci. Comput.*, 32 (2010), 894–922.
- [10] S. Amstutz, I. Horchani and M. Masmoudi, Crack detection by the topological gradient method, *Control and Cybernetics*, 34 (2005), 119–138.
- [11] E. Beretta, E. Francini, Asymptotic formulas for perturbations of the electromagnetic fields in the presence of thin imperfections, *Contemp. Math.*, 333 (2003), 49–63.
- [12] M. Bonnet, Fast identification of cracks using higher-order topological sensitivity for 2-D potential problems, *Eng. Anal. Bound. Elem.*, 35 (2011), 223–235.
- [13] X. Chen and Y. Zhong, MUSIC electromagnetic imaging with enhanced resolution for small inclusions, *Inverse Probl.*, 25 (2009), 015008.
- [14] M. Cheney, The linear sampling method and the MUSIC algorithm, *Inverse Probl.*, 17 (2001), 591–595.
- [15] A. J. Devaney, Super-resolution processing of multi-static data using time-reversal and MUSIC, 2000, available at <http://www.ece.neu.edu/faculty/devaney/ajd/preprints.htm>
- [16] O. Dorn and D. Lesselier, Level set methods for inverse scattering, *Inverse Probl.* 22 (2006), R67–R131.
- [17] R. Griesmaier, Multi-frequency orthogonality sampling for inverse obstacle scattering problems, *Inverse Problems* 27 (2011) 085005.
- [18] S. Hou, K. Huang, K. Sølna, and H. Zhao, A phase and space coherent direct imaging method, *J. Acoust. Soc. Am.* 125 (2009), 227–238.
- [19] S. Hou, K. Sølna and H. Zhao, A direct imaging algorithm for extended targets, 22 (2006), 1151–1178.
- [20] Y. D. Jo and W.-K. Park, On the imaging of perfectly conducting cracks via MUSIC-type algorithm, preprint.
- [21] A. Kirsch and S. Ritter, A linear sampling method for inverse scattering from an open arc, *Inverse Problems* 16 (2000), 89–105.
- [22] R. Kress, Inverse scattering from an open arc, *Math. Meth. Appl. Sci.*, 18 (1995), 267–293.
- [23] W.-K. Park, A study on multi-frequency electromagnetic imaging, available at <http://arxiv.org/abs/1208.2063>.
- [24] W.-K. Park, Non-iterative imaging of thin electromagnetic inclusions from multi-frequency response matrix, *Prog. Electromagn. Res.*, 106 (2010), 225–241.
- [25] W.-K. Park, On the imaging of thin dielectric inclusions buried within a half-space, *Inverse Probl.*, 26 (2010), 074008.

- [26] W.-K. Park, On the imaging of thin dielectric inclusions via topological derivative concept, *Prog. Electromagn. Res.*, 110 (2010), 237–252.
- [27] W.-K. Park, Topological derivative strategy for one-step iteration imaging of arbitrary shaped thin, curve-like electromagnetic inclusions, *J. Comput. Phys.*, 231 (2012), 1426–1439.
- [28] W.-K. Park and D. Lesselier, Electromagnetic MUSIC-type imaging of perfectly conducting, arc-like cracks at single frequency, *J. Comput. Phys.*, 228 (2012), 8093–8111.
- [29] W.-K. Park and D. Lesselier, Fast electromagnetic imaging of thin inclusions in half-space affected by random scatterers, *Waves Random Complex Media*, 22 (2012), 3–23.
- [30] W.-K. Park and D. Lesselier, MUSIC-type imaging of a thin penetrable inclusion from its far-field multi-static response matrix, *Inverse Probl.*, 25 (2009), 075002.
- [31] W.-K. Park and D. Lesselier, Reconstruction of thin electromagnetic inclusions by a level set method, *Inverse Probl.*, 25 (2009), 085010.